


INSPECTION

INSPECT WASHER NOZZLE

(a) Except U. S. A. cold area and CANADA:
While operating the washer, check that points where the washer fluid from the nozzles hits the windshield and the upsurge area are within the range indicated by the hatched line.

- A: Approx. 150 mm (5.91 in.)**
- B: Approx. 186 mm (7.32 in.)**
- C: Approx. 216 mm (8.50 in.)**
- D: Approx. 305 mm (12.01 in.)**
- E: Approx. 339 mm (13.35 in.)**
- F: Approx. 366 mm (14.41 in.)**
- G: Approx. 390 mm (15.35 in.)**
- H: Approx. 454 mm (17.87 in.)**
- I: Approx. 487 mm (19.17 in.)**

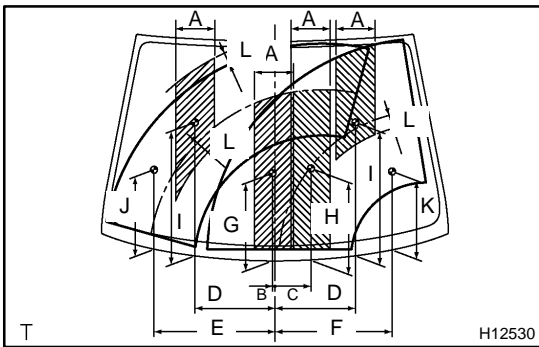

(b) U. S. A. cold area and CANADA:
While operating the washer, check that points where the washer fluid from the nozzles hits the windshield and the upsurge area are within the range indicated by the hatched line.

- A: Approx. 150 mm (5.91 in.)**
- B: Approx. 7 mm (0.28 in.)**
- C: Approx. 135 mm (5.31 in.)**
- D: Approx. 306 mm (12.05 in.)**
- E: Approx. 467 mm (18.39 in.)**
- F: Approx. 442 mm (17.40 in.)**
- G: Approx. 334 mm (13.15 in.)**
- H: Approx. 344 mm (13.54 in.)**
- I: Approx. 504 mm (19.84 in.)**
- J: Approx. 302 mm (11.89 in.)**
- K: Approx. 294 mm (11.57 in.)**
- L: Approx. 50 mm (1.97 in.)**